CTS Tecnologie · Distributore di sistemi di sicurezza
info@ctstecnologie.it · Via Ugo la Malfa 8, 20128 Milano
www.ctstecnologie.it

TVT

Secure The World With You


CAMERA

TD-9844E3B

4MP Dual-lens Network IR Water-Proof Camera



- H.265+/H.265/H.264+/H.264/MJPEG coding
- Max. resolution: 2688 × 1520
- ICR auto switch, true day / night vision
- 20 ~ 30m IR night view distance
- 3D DNR, WDR, HLC, BLC, Defog, Smart IR and ROI coding
- Support image distortion correction
- Support 2-split screen preview
- Built-in micro SD card slot, up to 512GB
- DC12V/PoE power supply
- IP 66 & IK 10 ingress protection
- Support three streams
- Support remote monitoring by smart phones & tablet PCs with iOS and Android OS
- Support P2P function
- Multiple smart events can be enabled at the same time
- Support dual-system backup

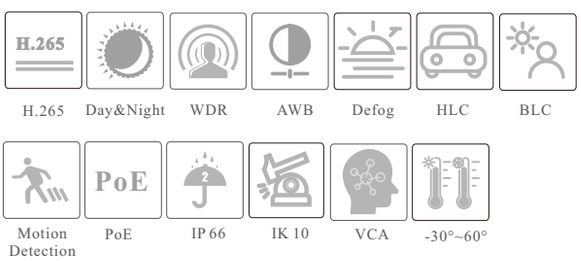

en.tvt.net.cn

For more information, please visit our website

Shenzhen TVT DIGITAL TECHNOLOGY CO., LTD.

Address: 23rd Floor, Block B4, Building NO.9, Shenzhen Bay Eco-Technology Park, Nanshan District, Shenzhen, Guangdong Province, P.R.China

Tel: +86-755-36995888 Fax: +86-755-33104777

Web site: http://en.tvt.net.cn E-mail: overseas@tvt.net.cn

Documento fornito da CTS Tecnologie · www.ctstecnologie.it · info@ctstecnologie.it

TVT TD-9844E3B

4MP Dual-lens Network IR Water-Proof Camera


SPECIFICATIONS

Model / Specifications	TD-9844E3B
Camera	
Image Sensor	1 / 3 "CMOS*2
Image Size	2688 × 1520
Electronic Shutter	1 / 3 s ~ 1 / 100000 s
Iris Type	Fixed Iris
Min. Illumination	0.005 lux@F1.6,AGC ON;0 lux with IR
Lens	2.8 mm@F1.6, Horizontal FoV: 101°; vertical FoV: 55°; diagonal FoV:122° 3.6 mm@F1.6, Horizontal FoV: 83°; vertical FoV: 42°; diagonal FoV:100°
Focus	Fixed
Lens Mount	M12
Day & Night	ICR
Wide Dynamic Range	120dB
BLC	Yes
HLC	Yes
Defog	Yes
S/N Ratio	⩾50dB
Digital NR	3D DNR
Angle Adjustment	Pan: -90°~90°; Tilt:0°~65°; Rotation: 0°~355°
Image	
Video Compression	Main/Third stream: H.265+ / H.265 / H.264+ / H.264 Sub stream: H.265+ / H.265 / H.264+ / H.264 / MJPEG
H.264 Compression Standard	Baseline Profile/Main Profile/High Profile
Resolution	4MP (2688×1520), 2K (2560×1440), 3MP(2304×1296), 1080P (1920×1080), 720P (1280×720), D1, VGA(640×480), 640×360, CIF, 480 × 240
Main Stream	4MP/2K/3MP/1080P (60Hz : 1 ~ 30fps; 50Hz: 1~25fps)
Sub Stream	720P/D1/VGA/640×360/480×240/CIF(60Hz : 1 ~ 30fps; 50Hz: 1~25fps)
Third Stream	D1/CIF/480×240 (60Hz : 1 ~ 30fps; 50Hz: 1~25fps)
Bit Rate	64 Kbps ~ 8 Mbps
Bit Rate Type	VBR / CBR
Audio Compression	G711A / U
Image Settings	ROI, Saturation, Brightness, Hue, Contrast, Wide Dynamic, Sharpness, Image Mirror, Image Flip, NR, etc. adjustable through client software or web browser
ROI	Each ROI to be configured separately
Intelligent Analytics	
Smart Event	Line crossing, region intrusion/entrance/exiting (human/vehicle classification) loitering detection, illegal parking detection, abandoned/ missing object detection
Statistics	Target counting by line/area, heat map
Exception Detection	Scene change, video blur and abnormal color detection, audio exception
Face Detection	Face detection and face capture
DORI Distance	

Lens	Detect	Observe	Recognize	Identify
2.8mm	58m(191ft)	23m(76ft)	12m(38ft)	6m(19ft)
3.6mm	79m(260ft)	32m(104ft)	16m(52ft)	8m(26ft)

Interfaces	
Network	RJ 45 10M/100M self-adaptive Ethernet port
Video Output	No
Audio	1CH audio input; 1CH audio output; 2CH built-in MICs; 1CH built-in speaker
Storage	Built-in micro SD card slot; up to 512GB
Reset	Yes
Alarm	2CH alarm input; 2CH alarm output
Power Output	Yes, max. DC12V@100mA
Functions	
Remote Monitoring	Web Browser/TVT NVMS2.0/NVR/mobile APP
Web Browser	Chrome 89.0+/Edge 89.0+/Firefox 87.0+/Safari 14.0+
Online Connection	Support simultaneous monitoring for up to 10 users; Support multi-stream real time transmission
Network Protocol	UDP, IPv4, IPv6, DHCP, NTP, RTSP, RTP, RTMP, RTCP, PPPoE, DDNS, SMTP, FTP, SNMP, HTTP, HTTP POST, 802.1x, UPnP, HTTPS, P2P, QoS
Interface Protocol	ONVIF
Storage	Network remote storage; micro SD card storage
Smart Alarm	Motion detection, SMD, SD card error, SD card full, IP address conflict, network disconnection, audio alarm
General Function	Watermark, video mask, heartbeat, image distortion correction, corridor pattern, disarming, ANR, cloud upgrade
Security	Video encryption, firmware encryption, HTTPS encryption, configuration encryption, illegal login lock, IP address filtering, 802.1x authentication, basic and digest authentication for HTTP/RTSP/API services
PoE	Yes , IEEE802.3af
IR Distance	20~30 m
Ingress Protection	IP 66& IK10
Others	
Power Supply	DC12V/PoE
Power Consumption	<9.5W
Storage Conditions	- 30 °C ~ 65°C (-22°F~149°F), Humidity: less than 95 % (non-condensing)
Operating Conditions	- 30 °C ~ 60 °C (-22°F~140°F), Humidity: less than 95 % (non-condensing)
Dimensions (mm)	165.4 × 97.4× 72
Weight (net)	Approx. 0.755KG
Installation	Ceiling mounting; Wall mounting
Certificate	CE, FCC
Environmental Protection	Directive EU RoHS, WEEE(2012/19/EU) , directive 94/62/EC and REACH(EC1907/2006)

DIMENSIONS

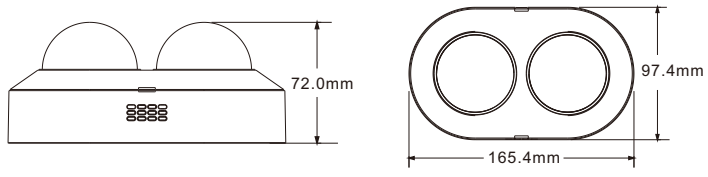

AVAILABLE ACCESSORIES



YXH0208

AVAILABLE MODEL

Available Model	TD-9844E3B(D/PE/AR2), 2.8mm lens*2
	TD-9844E3B(D/PE/AR2), 3.6mm lens*2

*All pictures and specifications are for reference only and are subject to change without prior notice.

Documento fornito da CTS Tecnologie · www.ctstecnologie.it · info@ctstecnologie.it

DATASHEET

Documentazione tecnica

Documentazione originale del produttore, messa a disposizione da CTS Tecnologie.

Sei un installatore o un’azienda?

Registrati all’area clienti per vedere i prezzi, ordinare online e scaricare cataloghi e listini dei marchi che distribuiamo.

www.ctstecnologie.it/registrazione

Contatti

Email	info@ctstecnologie.it
Sede	Via Ugo la Malfa 8, 20128 Milano
Sito	www.ctstecnologie.it

Vendita in tutta Italia · Assistenza tecnica in Lombardia

Cosa trovi da CTS Tecnologie

- Oltre 2.000 prodotti per antintrusione, videosorveglianza, antincendio e controllo accessi
- Consulenza per preparare preventivi con le soluzioni adatte al cliente
- Assistenza ai tecnici per installazione e programmazione dei marchi trattati
- Formazione tecnico-commerciale sulle apparecchiature distribuite

Le pagine precedenti riproducono il documento originale del produttore senza modifiche.
Marchi e contenuti appartengono ai rispettivi proprietari.