TVT

Secure The World With You

VMS Station



TD-A708E1-A0

Based on the conception of “All-in-One”, A708E1-A0 is a VMS station specially designed and developed for security surveillance application. Its software is installed before delivery and combines management, video preview and intelligent applications. Due to its low cost, simple deployment, flexible expansion, powerful performance and high reliability, it can meet the requirements of the medium and small-sized security systems.

Shenzhen TVT Digital Technology Co., LTD.
Address: 23rd Floor, Block B4, Building NO.9, Shenzhen Bay Eco-Technology Park, Nanshan District, Shenzhen, Guangdong Province, P.R. China
Tel: +86-755-36995888 Website: http://en.tvt.net.cn
Fax: +86-755-33104777 E-mail: overseas@tvt.net.cn

TD-A708E1-A0 VMS Station

Features

- High-performance hardware platform, stable and reliable
- Embedded Linux operating system; All-in-One simple deployment
- Supports 8 SATA interfaces and RAID0,1,5,6,10
- Supports the device access of TVT
- Supports ONVIF protocol
- Supports standard, widescreen and customized screen display modes
- Supports 1CH instant playback and main output alarm preview
- Supports device and storage server record search, playback and download
- Supports record search and playback by time, channel, event and tag
- Supports record clip and backup; Support backup by time and event
- Supports TV wall management, including splicing, PIP, roaming and triggering video on TV wall
- Supports human/vehicle monitoring deployment and visitor management
- Supports corridor pattern
- Supports 1CH fisheye camera access
- Supports PTZ control, preset and cruise settings and calling
- Supports voice monitoring, two-way talk and broadcast
- Supports picture map
- Supports various alarm types and linkages
- Supports multi-level, multi-area and multi-user permission management
- Supports SDK development package for customized integration application
- Supports Android mobile APP management

*All pictures and specifications are for reference only and are subject to change without prior notice

Documento fornito da CTS Tecnologie · www.ctstecnologie.it · info@ctstecnologie.it

TD-A708E1-A0 VMS Station

Specifications

System	Operation System	Linux
	Memory	LPDDR4 8G, 64GB EMMC
Video &Audio	Video Output	VGA×1: 1920*1080 (VGA and HDMI output the same video source)
		HDMI1: 3840×2160@60, 3840×2160@30, 1920×1080 HDMI2: 3840×2160@60, 3840×2160@30, 1920×1080 HDMI3: 3840×2160@60, 3840×2160@30, 1920×1080 HDMI4: 1920×1080
	Multi-screen Display	Main output(HDMI1): 1/2/3/4/6/7/8/9/10/12/13/16/24/25/33/36 AUX output(HDMI2): 1/2/3/4/6/7/8/9/10/12/13/16 AUX output(HDMI3): 1/2/3/4/6/7/8/9/10/12/13/16 AUX output(HDMI4): 1/2/3/4/6/7/8/9/10/12/13/16
	Video Compression	H.264/H.265/H.265+/H.265S
	Audio Output	1CH audio output (MONO Out)
		Support HDMI1 audio output
	Audio Compression	G.711(U/A)
Live View	Max. number of preview	84(36+16+16+16)
	Max. Resolution	16MP
	Decoding Capability	1 ×16MP or 4 ×12MP or 6 ×8MP (only available for main output)
Playback	Simultaneous Playback	16CH
	Max. Resolution	16MP
	Decoding Capability	1 ×16MP or 4 ×12MP or 6 ×8MP (only available for main output)
Performance	Max. User Access	64 users
	Max. Online Users	64 users preview simultaneously
	Max. Number of Channel Access	512CH
	Max. Number of Device Access	256 devices
	Max. Number of Decoding Output	16
	Max. Number of Transfer Server Access	1
	Max. Number of Storage Server Access	1
	Max. Channel Number of Recording per Storage Server	64
	Max. Number of Channel Access of Third-party protocol	512
	Max. Number of Device Access of Third-party protocol	256
	Max. Channel Number of Simultaneous Preview	256 (for one client/user)
	Max. Channel Number of Simultaneous Playback	16 (for one client/user)
	Max. Number of Views	Up to 64 view plans can be created
	Max. Number of Channel Access of Single Transfer Service	512
	Max. Number of Device Access of Single Transfer Service	256


*All pictures and specifications are for reference only and are subject to change without prior notice


Documento fornito da CTS Tecnologie · www.ctstecnologie.it · info@ctstecnologie.it

	Incoming Bandwidth	640Mbps
	Outgoing Bandwidth	256Mbps
	Storage Bandwidth	384Mbps
	Face Database	A maximum of 30,000 face pictures can be registered Comparison Capability: 30 pictures/second
	Vehicle Database	A maximum of 10,000 license plates can be registered Comparison Capability: 25 pictures/second
	Fisheye Camera Access	Support 1CH fisheye camera to set fisheye mode
	Number of TV Wall	Max. 16 TV walls can be created
	TV Wall Plan per TV Wall	Max. 64 plans can be set for each TV wall
External Interfaces	Ethernet Interface	2 RJ45 10M/100M/1000M self-adaptive Ethernet ports
	Storage	SATA3.0 x 8，up to 10TB per HDD; Supports RAID0,1,5,6,10
	E-SATA Interface	E-SATA ×2
	Alarm	16CH alarm input; 4CH alarm output
	USB	USB3.0 ×1 ， USB 2.0 ×2
	RS485	Full-duplex (currently no function)
Others	Power	ATX-200W
	Power Consumption	≤50 W (without HDD)
	Working Temperature	–10 ℃ - +50 ℃
	Relative Humidity	10% ~ 90%
	Dimensions	445 ×436 ×90mm
	Environmental Protection	Directive EU RoHS， WEEE(2012/19/EU) , Directive 94/62/EC and REACH(EC1907/2006)

Dimensions

Unit: mm

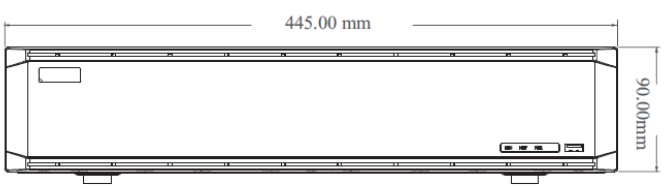

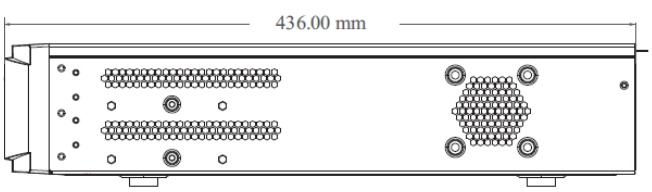

*All pictures and specifications are for reference only and are subject to change without prior notice

Documento fornito da CTS Tecnologie · www.ctstecnologie.it · info@ctstecnologie.it

DATASHEET

Documentazione tecnica

Documentazione originale del produttore, messa a disposizione da CTS Tecnologie.

Sei un installatore o un’azienda?

Registrati all’area clienti per vedere i prezzi, ordinare online e scaricare cataloghi e listini dei marchi che distribuiamo.

www.ctstecnologie.it/registrazione

Contatti

Email	info@ctstecnologie.it
Sede	Via Ugo la Malfa 8, 20128 Milano
Sito	www.ctstecnologie.it

Vendita in tutta Italia · Assistenza tecnica in Lombardia

Cosa trovi da CTS Tecnologie

- Oltre 2.000 prodotti per antintrusione, videosorveglianza, antincendio e controllo accessi
- Consulenza per preparare preventivi con le soluzioni adatte al cliente
- Assistenza ai tecnici per installazione e programmazione dei marchi trattati
- Formazione tecnico-commerciale sulle apparecchiature distribuite

Le pagine precedenti riproducono il documento originale del produttore senza modifiche.
Marchi e contenuti appartengono ai rispettivi proprietari.