AI PoE Switch

4/8-Port AI PoE Switch



- AI Watchdog Function mode (D):

  When the switch status is “ON” (default OFF), auto-detect the data communication status of all PoE ports in real-time, and restart PoE IP camera timely if the camera is halted

- Long-distance transmission mode (E)

  When the switch status is “ON” (default OFF), all PoE ports rate is 10M/250m transmission

- 4KV Lightning & 8KV ESD Protection
- 100Mbps PoE Ports

Shenzhen TVT Digital Technology Co., LTD.

Address: 23rd Floor, Block B4, Building NO.9, Shenzhen Bay Eco-Technology Park, Nanshan District, Shenzhen, Guangdong Province, P.R. China

Tel: +86-755-36995888 Website: http://en.tvt.net.cn

Fax: +86-755-33104777 E-mail: overseas@tvt.net.cn

AI PoE Switch

Specifications


Model	TD-B2204S1-PEU	TD-B2208S1-PEU	TD-B2208S1-PGU
Network Parameters			
PoE Ports	4 ×10/100 Mbps PoE ports(RJ45)	8 ×10/100 Mbps PoE ports(RJ45)	8 ×10/100 Mbps PoE ports(RJ45)
Uplink Ports	2 ×10/100 Mbps ports(RJ45)	2 ×10/100 Mbps ports(RJ45)	2 ×10/100/1000 Mbps ports(RJ45)
Network Standard	IEEE 802.3, IEEE 802.3u, IEEE 802.3x		
MAC Address Table	1K	2K	2K
Switching Capacity	1.2Gbps	2.0Gbps	5.6Gbps
The Frame Filter & Transmission Rate	14800pps the most for the long distance mode, 148800pps the most for 100M port, 1.488Mpps the most for 1000M port		
Function Switch	E file: long distance transmission and VLAN isolation function. (Default: OFF, Use: ON)		
	D File: AI self-healing mode. When the network fails, PoE watchdog will restart the power supply of the device and automatically repair the network communication. (Default: OFF, Use: ON)		
	Note: The function switch can control different functions, which can be enabled separately and simultaneously		
LED Indicator	Power: PWR (green), Network: L/A (green), Functional switch: EXTEND (green)		
PoE			
PoE Standard	IEEE 802.3af, IEEE 802.3at		
PoE Ports	1-4 ports	1-8 ports	1-8 ports
Power Output	Port:1/2(+), 3/6(-)		
Max. Port Power	30W		
General Parameters			
Power	AC 100~240V		
Power Consumption	Max. 60W	Max.120W	Max.120W
Protection Level	Lightning Protection:4KV；ESD Protection:8KV		
Dimensions	143×115×40mm	195×130×40mm	195×130×40mm
Environment	Operating Temperature:-20℃~55℃		
	Storage Temperature:-40℃~70℃		
	Operating Humidity:10%~90%Non-condensing		
	Storage Humidity:5%~90%Non-condensing		
Weight (net)	1.0kg	1.0kg	1.0kg
Installation	Desktop		

*All pictures and specifications are for reference only and are subject to change without prior notice


Documento fornito da CTS Tecnologie · www.ctstecnologie.it · info@ctstecnologie.it

Dimensions

4-Port

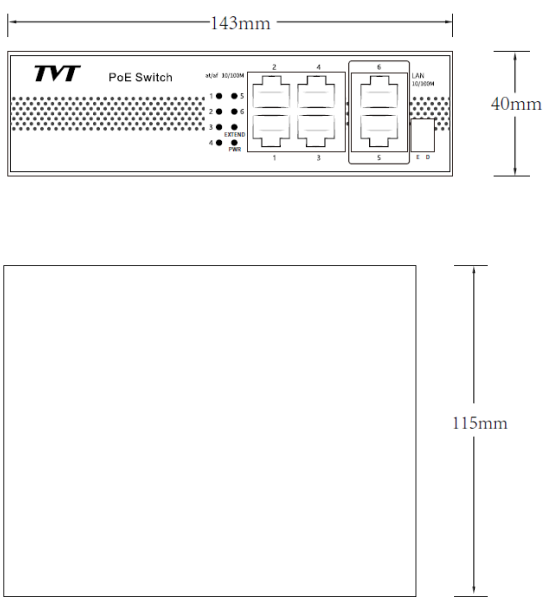

8-Port

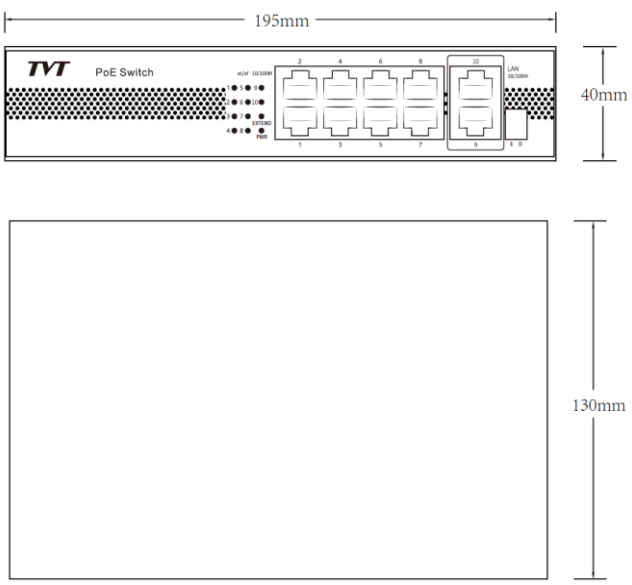

*All pictures and specifications are for reference only and are subject to change without prior notice

Documento fornito da CTS Tecnologie · www.ctstecnologie.it · info@ctstecnologie.it

DATASHEET

Documentazione tecnica

Documentazione originale del produttore, messa a disposizione da CTS Tecnologie.

Sei un installatore o un’azienda?

Registrati all’area clienti per vedere i prezzi, ordinare online e scaricare cataloghi e listini dei marchi che distribuiamo.

www.ctstecnologie.it/registrazione

Contatti

Email	info@ctstecnologie.it
Sede	Via Ugo la Malfa 8, 20128 Milano
Sito	www.ctstecnologie.it

Vendita in tutta Italia · Assistenza tecnica in Lombardia

Cosa trovi da CTS Tecnologie

- Oltre 2.000 prodotti per antintrusione, videosorveglianza, antincendio e controllo accessi
- Consulenza per preparare preventivi con le soluzioni adatte al cliente
- Assistenza ai tecnici per installazione e programmazione dei marchi trattati
- Formazione tecnico-commerciale sulle apparecchiature distribuite

Le pagine precedenti riproducono il documento originale del produttore senza modifiche.
Marchi e contenuti appartengono ai rispettivi proprietari.