
AI PoE Switch

16/24-Ports AI PoE Switch

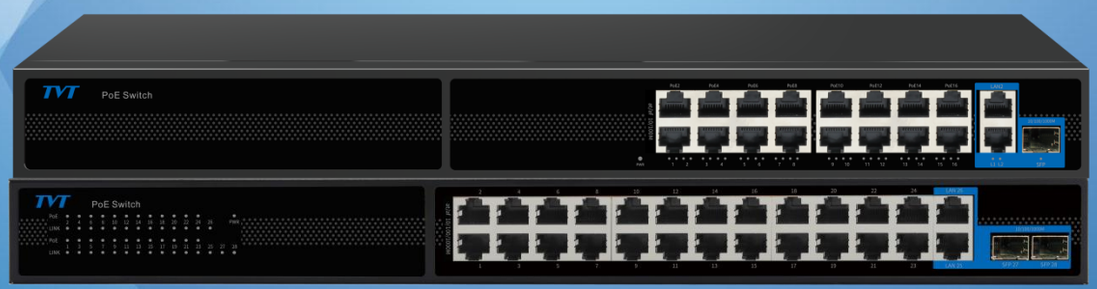

- AI Watchdog Function

  Auto-detect the data communication status of all PoE ports in real-time, and restart PoE IP camera timely if the camera is halted

- Auto-Adaption 250m Transmission

  Using the latest transmission technology, each port of the switch intelligently judges the transmission distance and automatically adapts 250m transmission, not including 1000M PoE ports

- 6KV Lightning & 8KV ESD Protection
- 1000Mbps RJ45 and SFP Uplink Ports

Shenzhen TVT Digital Technology Co., LTD.

Address: 23rd Floor, Block B4, Building NO.9, Shenzhen Bay Eco-Technology Park, Nanshan District, Shenzhen, Guangdong Province, P.R. China

Tel: +86-755-36995888 Website: http://en.tvt.net.cn

Fax: +86-755-33104777 E-mail: overseas@tvt.net.cn

AI PoE Switch

Specifications


Model	TD-B2216S1-PGS	TD-B2224S1-PGS	TD-B2224S1-PGA
Network Parameters			
PoE Ports	16 × 10/100 Mbps PoE ports(RJ45)	24 × 10/100 Mbps PoE ports(RJ45)	24 × 10/100/1000 Mbps PoE ports(RJ45)
Uplink Ports	2 × 10/100/1000 Mbps ports(RJ45)		
SFP Port	1 × 1000Mbps SFP fiber port(Data)	2 × 1000Mbps SFP fiber ports(Data)	
Network Standard	IEEE 802.3, IEEE 802.3u, IEEE 802.3x		
MAC Address Table	8K		
Switching Capacity	9.2Gbps	12.8Gbps	56Gbps
The Frame Filter & Transmission Rate	14800pps the most for the long distance mode, 148800pps the most for 100M port, 1.488Mpps the most for 1000M port		
Transmission Distance	100Mbps /10Mbps, Auto-Adaption 250m except the last two PoE ports		130m
PoE			
PoE Standard	IEEE 802.3af, IEEE 802.3at		
PoE Ports	1-16 ports	1-24 ports	1-24 ports
Power Output	Port:1/2(+), 3/6(-)		
Max. Port Power	30W		
General Parameters			
Power	AC 100~240V		
Power Consumption	Max. 250W	Max.300W	Max.300W
Protection Level	Lightning Protection: 6KV; ESD Protection: 8KV		
Dimensions	440×180×45mm		
Environment	Operating Temperature: -20℃~60℃		
	Storage Temperature: -40℃~70℃		
	Operating Humidity: 10%~90%Non-condensing		
	Storage Humidity: 5%~90%Non-condensing		
Weight (net)	< 2.8kg	< 3kg	< 3kg
Installation	Desktop mount; Rack mount		

*All pictures and specifications are for reference only and are subject to change without prior notice

Documento fornito da CTS Tecnologie · www.ctstecnologie.it · info@ctstecnologie.it

AI PoE Switch

Dimensions

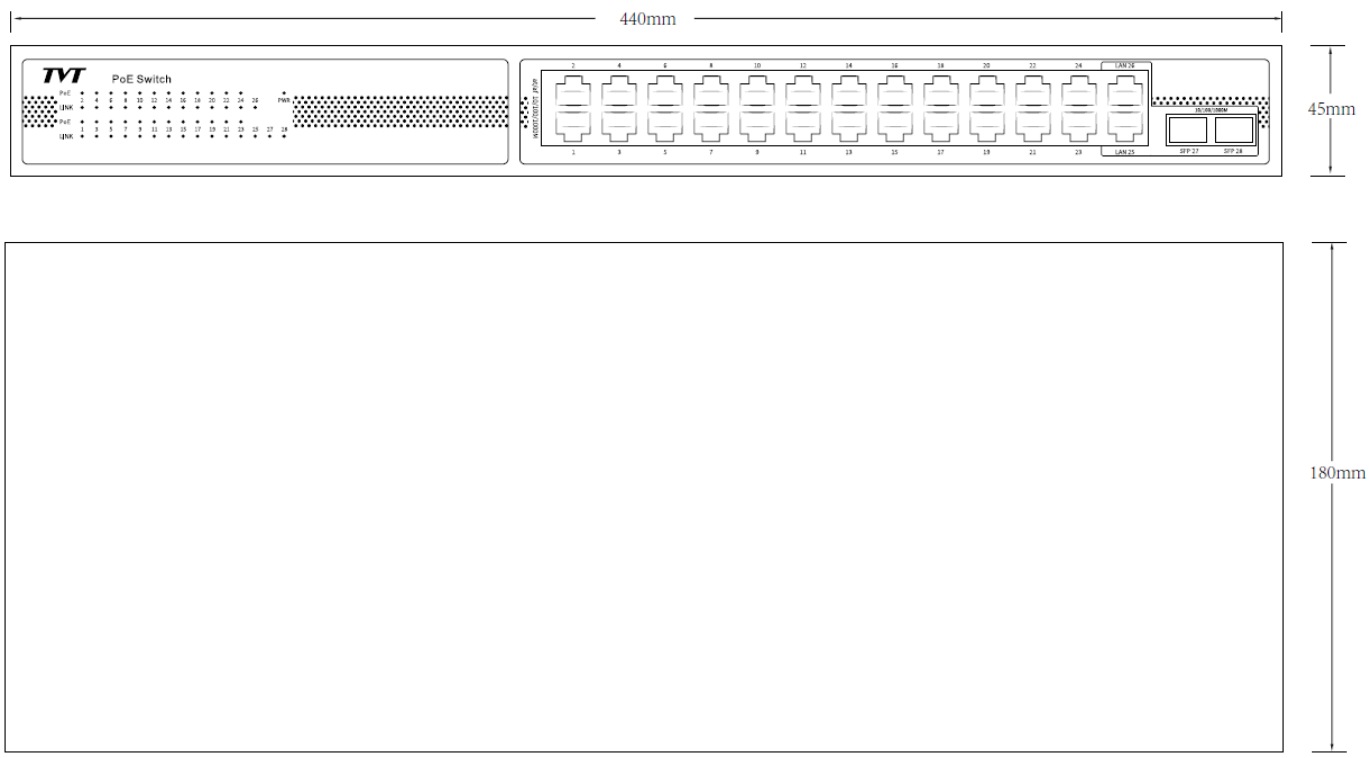

*All pictures and specifications are for reference only and are subject to change without prior notice

Documento fornito da CTS Tecnologie · www.ctstecnologie.it · info@ctstecnologie.it

DATASHEET

Documentazione tecnica

Documentazione originale del produttore, messa a disposizione da CTS Tecnologie.

Sei un installatore o un’azienda?

Registrati all’area clienti per vedere i prezzi, ordinare online e scaricare cataloghi e listini dei marchi che distribuiamo.

www.ctstecnologie.it/registrazione

Contatti

Email	info@ctstecnologie.it
Sede	Via Ugo la Malfa 8, 20128 Milano
Sito	www.ctstecnologie.it

Vendita in tutta Italia · Assistenza tecnica in Lombardia

Cosa trovi da CTS Tecnologie

- Oltre 2.000 prodotti per antintrusione, videosorveglianza, antincendio e controllo accessi
- Consulenza per preparare preventivi con le soluzioni adatte al cliente
- Assistenza ai tecnici per installazione e programmazione dei marchi trattati
- Formazione tecnico-commerciale sulle apparecchiature distribuite

Le pagine precedenti riproducono il documento originale del produttore senza modifiche.
Marchi e contenuti appartengono ai rispettivi proprietari.