
TE-VH1104S1-PTW

Video Intercom
Indoor Station

TE-VH1104S1-PTW

Video Intercom Indoor Station

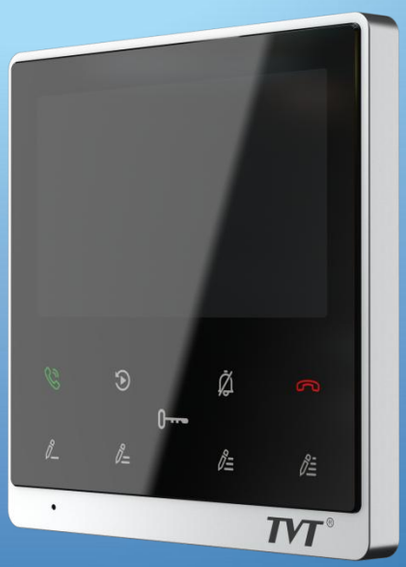

- 4.3 inch IPS touch screen with resolution of 480×272
- A maximum of 6 indoor stations can be installed in the same room
- Supports live preview of door stations or linked cameras
- Capturing pictures and recording videos when calling via door station (micro SD card required)
- Supports “Do Not Disturb” function
- Supports noise suppression and echo cancellation
- Self-define unlocking password
- 4 custom touch buttons, convenient for users to customize functional shortcuts as needed
- Supports 2.4G WIFI
- 2CH alarm input and 1CH alarm output
- Standard PoE power supply

Shenzhen TVT Digital Technology Co., LTD.
Address: 23rd Floor, Block B4, Building NO.9, Shenzhen Bay Eco-Technology Park, Nanshan District, Shenzhen, Guangdong Province, P.R. China
Tel: +86-755-36995888 Website: http://en.tvt.net.cn
Fax: +86-755-33104777 E-mail: overseas@tvt.net.cn

TE-VH1104S1-PTW

Video Intercom
Indoor Station


Specifications

System	Operating System	Linux
Display	Display Screen	4.3 inch IPS touch screen
	Display Resolution	480 ×272, 16:9, brightness:300 cd/m2
	Operation Method	Capacitive touch screen
Video	Video Input	Max. 1CH video can be viewed simultaneously
	Network Input Resolution	5MP/4MP/3MP/1080P/1280×1024/960P/720P/960H/D1/CIF
	Compression	H.265+/H.265/ H.264
Audio	Local Input	Built-in microphone
	Local Output	Built-in speaker
	Compression	G.711(U/A)
Record	Resolution	Up to 2MP
	Frame Rate	NTSC: 30fps; PAL:25fps
Playback	Simultaneous Playback	Max.1CH
Performance	Linked IPC& Door Station	Max. 16 CH
	Linked Indoor Extensions	Max. 5
Network	Interface	RJ 45 100 Mbps self-adaptive Ethernet port ×1
	Wireless Network	WiFi 802.11b/g/n
	Protocol	TCP / IP, DHCP, RTSP, etc.
Interface	Audio	Built-in speaker and microphone, support noise suppression and echo cancellation
	Storage	Built-in micro SD card slot, up to 256GB
	Reset	Yes
	Alarm Input / Output	2CH alarm input; 1CH alarm output
	Touch Buttons	Yes
	Wi-Fi	Yes,2.4G Wi-Fi
Touch Buttons	Answer	Yes
	Hang Up	Yes
	Preview	Yes
	Do Not Disturb	Yes
	Unlock	Yes
	Custom Buttons	4 self-defined shortcut buttons
	Backlight Compensation	Yes
Others	PoE	IEEE802.3af
	Power	DC12V/POE
	Power Consumption	< 6W
	Dimensions(mm)	120mm x 120mm x 22.5mm
	Weight (net)	Approx.200g
	Installation	Wall mounting
	Working Environment	-20℃~50℃, Humidity: less than 95% (non-condensing)
	Certificate	CE, FCC
	Environmental Protection	Complies with Directive EU RoHS, REACH and WEEE

Documento fornito da CTS Tecnologie · www.ctstecnologie.it · info@ctstecnologie.it

Dimensions

Unit（mm）

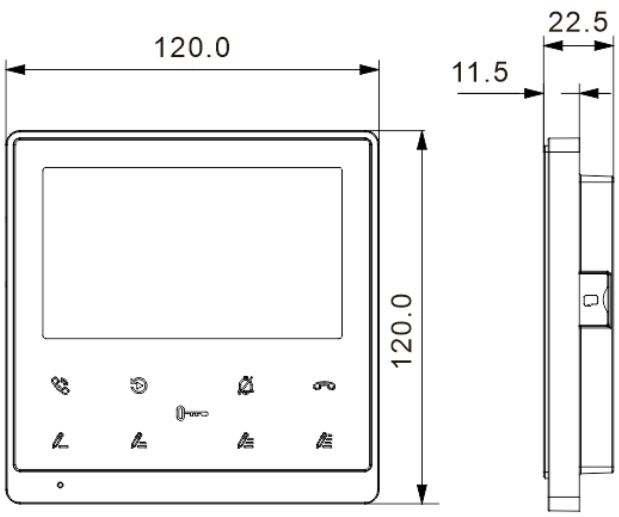

DATASHEET

Documentazione tecnica

Documentazione originale del produttore, messa a disposizione da CTS Tecnologie.

Sei un installatore o un’azienda?

Registrati all’area clienti per vedere i prezzi, ordinare online e scaricare cataloghi e listini dei marchi che distribuiamo.

www.ctstecnologie.it/registrazione

Contatti

Email	info@ctstecnologie.it
Sede	Via Ugo la Malfa 8, 20128 Milano
Sito	www.ctstecnologie.it

Vendita in tutta Italia · Assistenza tecnica in Lombardia

Cosa trovi da CTS Tecnologie

- Oltre 2.000 prodotti per antintrusione, videosorveglianza, antincendio e controllo accessi
- Consulenza per preparare preventivi con le soluzioni adatte al cliente
- Assistenza ai tecnici per installazione e programmazione dei marchi trattati
- Formazione tecnico-commerciale sulle apparecchiature distribuite

Le pagine precedenti riproducono il documento originale del produttore senza modifiche.
Marchi e contenuti appartengono ai rispettivi proprietari.