TD-1501E



- Max. resolution:5MP (2592×1944) @20fps
- H.265+/H.265/H.264+/H.264/MJPEG coding
- Support ROI coding
- Support UTC (Up-The-Coax) control
- 8CH alarm input, 4CH alarm output
- 1CH audio input, 1CH audio output
- 1CH micro SD card slot, up to 256G
- Support three streams
- Intelligent analytics
- Support P2P function

Shenzhen TVT Digital Technology Co., LTD.
Address: 23rd Floor, Block B4, Building NO.9, Shenzhen Bay Eco-Technology Park, Nanshan District, Shenzhen, Guangdong Province, P.R. China
Tel: +86-755-36995888 Website: http://en.tvt.net.cn
Fax: +86-755-33104777 E-mail: overseas@tvt.net.cn

TD-1501E

Specifications

Model	TD-1501E
Video	
Analog Video Input	BNC×1
	BNC interface (1.0Vp-p; 75Ω)
	TVI/AHD/CVI : 5MP@20fps; 4MP/1080P/720P @30fps CVBS video signal input supported
Video Compression	H.265+/H.265/ H.264+ / H.264 / MJPEG
H.264 Compression Standard	Baseline Profile/Main Profile/High Profile
Bit rate Type	VBR/CBR
Bit Rate	64Kbps ~ 8Mbps
Resolution	5MP (2592×1944), 4MP (2560×1440), 1080P (1920 ×1080), 720P (1280 × 720), D1, CIF, VGA(640 × 480), 640 × 360, 480 × 240
Main Stream	5MP(1~20fps)/4MP/1080P/720P/D1 (60Hz:1~30fps; 50Hz:1~25fps)
Sub Stream	720P/D1/VGA/640×360/CIF (60Hz:1~30fps; 50Hz:1~25fps)
Third Stream	D1/VGA/CIF/480×240 (60Hz:1~30fps; 50Hz:1~25fps)
Audio	
Audio Input	1CH 3.5mm audio input
Two-way Audio	Take up the above audio input
Audio Output	1CH 3.5mm audio output
Audio Compression	G711A/U
Image	
Image Setting	Saturation, hue, brightness, contrast, wide dynamic range, sharpness, defog, NR, image mirror, image flip, etc., adjustable through client or web browser
ROI	8 ROI, each region can be set up separately
Interfaces	
Network	100M RJ45
Audio	1CH 3.5mm audio input; 1CH 3.5mm audio output
Video	1CH BNC video input
Storage	1 micro SD card slot, up to 256G
Alarm	8CH alarm input; 4CH alarm output
Function	
Remote Monitoring	Web browser/TVT NVMS2.0/NVR/mobile APP
Online Connection	Supports simultaneous monitoring for up to 8 users Supports multi-stream real time transmission
Network Protocol	UDP, IPv4, IPv6, DHCP, NTP, RTSP, RTMP, PPPoE, DDNS, SMTP, FTP, SNMP, 802.1x, UPnP, HTTPS, HTTP POST, Qos, P2P
Interface Protocol	ONVIF
Storage	Network remote storage; micro SD card storage
Smart Alarm	SD card full, SD card error, IP address conflict, cable disconnection, sensor alarm, motion alarm
Intelligent Analytics	Video exception detection: video blur detection, abnormal color detection, scene change detection; Audio exception detection
	Perimeter protection: line crossing/region entrance/ region exiting/ region intrusion detection (people/motor vehicle/non-motor vehicle classification)
	Statistics: target counting by line/area (people/motor vehicle/non-motor vehicle classification)
	Face detection: face detection, face capture
	Other events: abandoned/missing object detection, heat map, loitering detection, illegal parking detection
General Function	Watermark, IP address filtering, video mask, heartbeat, illegal login, corridor pattern
PoE	Yes, IEEE802.3af

Documento fornito da CTS Tecnologie · www.ctstecnologie.it · info@ctstecnologie.it


Water-proof Grade	No
Others	
Power Input	DC12V/PoE
Power Output	Yes, max. 12V@0.5A
Power Consumption	< 5.5W
Environmental Protection	RoHS 2.0, REACH, WEEE, directive94/62/EC
Working Environment	-30℃~60℃, Humidity: less than 95% (non-condensing)
Storage Environment	-30℃~65℃, Humidity: less than 95% (non-condensing)
Dimensions(mm)	Server: 108.5×87.8×28.0
Weight (net)	Approx. 271.4 g
Installation	Wall mounting

Available Model

Available Model	TD-1501E-ME

Dimensions

Unit（mm）

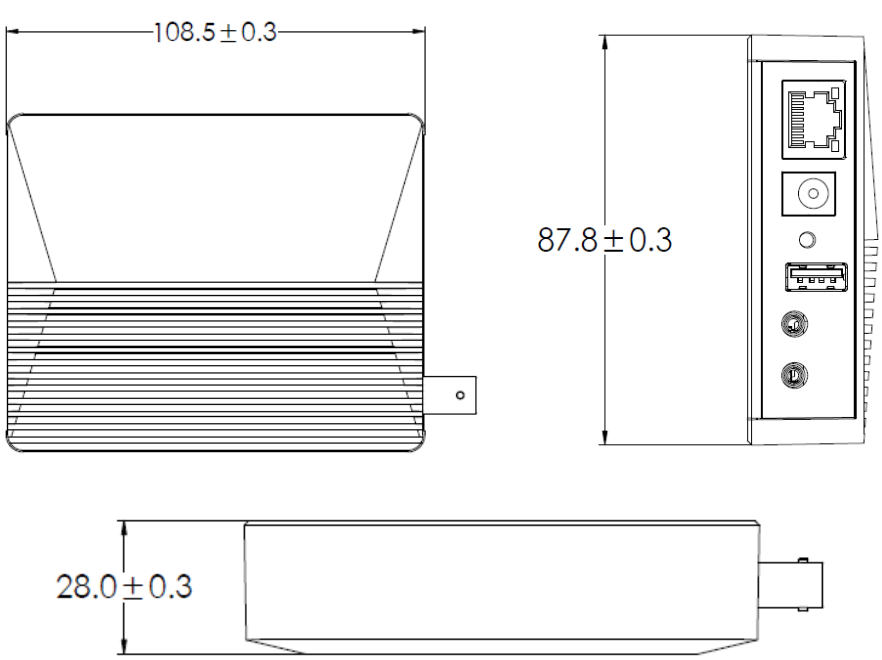

DATASHEET

Documentazione tecnica

Documentazione originale del produttore, messa a disposizione da CTS Tecnologie.

Sei un installatore o un’azienda?

Registrati all’area clienti per vedere i prezzi, ordinare online e scaricare cataloghi e listini dei marchi che distribuiamo.

www.ctstecnologie.it/registrazione

Contatti

Email	info@ctstecnologie.it
Sede	Via Ugo la Malfa 8, 20128 Milano
Sito	www.ctstecnologie.it

Vendita in tutta Italia · Assistenza tecnica in Lombardia

Cosa trovi da CTS Tecnologie

- Oltre 2.000 prodotti per antintrusione, videosorveglianza, antincendio e controllo accessi
- Consulenza per preparare preventivi con le soluzioni adatte al cliente
- Assistenza ai tecnici per installazione e programmazione dei marchi trattati
- Formazione tecnico-commerciale sulle apparecchiature distribuite

Le pagine precedenti riproducono il documento originale del produttore senza modifiche.
Marchi e contenuti appartengono ai rispettivi proprietari.